



河北安加丝网制造有限公司

HEBEI ANJIA WIRE NET WEAVING CO.,LTD



WIRE NET

河北安加丝网制造有限公司

HEBEI ANJIA WIRE NET WEAVING CO.,LTD

地址：中国·河北省·安平县·陵园路118号
Add : 118 Ling Yuan Street, Anping County, Hebei Province.China
电话(Tel) : +86 318 7521888 8066812
传真(Fax) : +86 318 7513915
邮箱(E-mail) : sales@anjiawiremesh.com
网址 : [Http://www.anjiawiremesh.com](http://www.anjiawiremesh.com) / www.fence.net.cn
邮编(P.C.) : 053600

广州分公司


Guangzhou Branch

地址：广州市黄埔大道西76号盈隆广场23A-11-12
Add : 23A-11-12 Yinglong Plaza No.76 Huangpu Dadaoxi Guangzhou
邮编(P.C.) : 510630

外贸部门 * Export Sales Dept.
电话(Tel) : +86 20 38390898 38390776 38390775
传真(Fax) : +86 20 38390793
网址 : [Http://www.anjiawiremesh.com](http://www.anjiawiremesh.com) / www.fence.net.cn
邮箱(E-mail) : market@yasw.com

内销部门 * Domestic Sales Dept.
电话(Tel) : +86 20 38390891 38390893
传真(Fax) : +86 20 38390792
网址 : [Http://www.anjiawiremesh.com](http://www.anjiawiremesh.com) / www.fence.net.cn
邮箱(E-mail) : market@anjiawiremesh.com

河北安加 HEBEI ANJIA

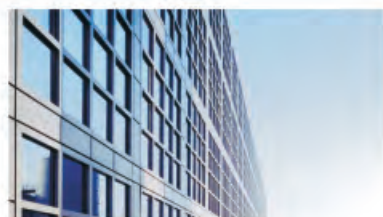

BRIEF 企业简介 INTRODUCTION

Hebei Anjia Wire net Weaving Co.,Ltd is a factory specialized in production of metal wire and metal wire mesh with a long history. Our products are manufactured under strict observation of the ISA and the Chinese National Standards(GB), The factory is provided with complete, rational and advanced equipment for the whole manufacturing process from meltion to knitting.

We have the complete testing and measurig equipment, ensuring the stable and reliable quality of the products. Our products sell well both domestic and abroad and enjoy high international prestige. We are ready to supply our customers with good quality wire and mesh in accordance with their requirements.

All who come from abroad or from other cities of our country contact us for business or for technical cooper ations are welcome heartily. We adheres to the principle of credit of credit and quality first, and provides high-quality products and services.






PVC Coated Welded Wire Mesh				
Gauge	Mesh	WL	Note:	
2.0MM/2.6MM	4" x2"	3 'x100'	1. GAUGE: BWG12TO24	
1.9MM/2.5MM	3" x2"	3 'x100'	2. MESH: 1/4 " , 3/8" , 5/8 " , 1/2" , 3/4 " , 1" TO 6 "	
1.9MM/2.5MM	2" x2"	3 'x100'	3. WIDTH : 2 " TO 7"	
1.9MM/2.5MM	2" x1"	3 'x100'	4. LENGTH : 10 " TO 300"	
1.6MM/2.1MM	3" x2"	3 'x100'	5. PACKING: MOISTER-PROOF PAPER OR PVC FILM	
0.8MM/1.1MM	1/2" x1/2"	3 'x100'	6. COLOR: GREEN, BLACK OR AS SPECIAL PEQUIREMENTS	
0.6MM/0.7MM	3/4" x3/4"	3 'x100'		

PVC coated welded wire mesh is made of quality welded low carbon steel wire mesh galvanized before, then coated with PVC powder or PE powder, The coated layer is even, strong adhesiveness and bright luster with long life, good anti-corrosive prosperity. All kinds of colors can be coated according to customers' special requirements.



WELDED WIRE MESH 电焊网

Galvanized Welded Wire Mesh				
Specification in British System		Specification in Metric System		Packing dia. mm
Width length: 3 ' x 100 '		Widthlength: 0.914m x 30.48m		
Width length: 4 ' x 100 '		Widthlength: 1.219m x 1.219m		
Mesh	BWG	Mesh	GAUGE	
1 " x 2 "	14	25.4mm x 50.8mm	2.10mm	390
1 " x 2 "	15	25.4mm x 50.8mm	1.82mm	360
1 " x 2 "	16	25.4mm x 50.8mm	1.65mm	320
1 " x 2 "	17	25.4mm x 50.8mm	1.47mm	310
1 " x 1 "	14	25.4mm x 25.4mm	2.10mm	400
1 " x 1 "	15	25.4mm x 25.4mm	1.82mm	370
1 " x 1 "	16	25.4mm x 25.4mm	1.65mm	330
1 " x 1 "	17	25.4mm x 25.4mm	1.47mm	320
1 " x 1 "	18	25.4mm x 25.4mm	1.24mm	280
1 " x 1 "	19	25.4mm x 25.4mm	1.06mm	255
3/4 " x 3/4 "	16	19.05mm x 19.05mm	1.65mm	350
3/4 " x 3/4 "	17	19.05mm x 19.05mm	1.47mm	330
3/4 " x 3/4 "	18	19.05mm x 19.05mm	1.24mm	290
3/4 " x 3/4 "	19	19.05mm x 19.05mm	1.06mm	260
3/4 " x 3/4 "	20	19.05mm x 19.05mm	0.88mm	240
1/2 " x 1 "	17	12.7mm x 25.4mm	1.47mm	335
1/2 " x 1 "	18	12.7mm x 25.4mm	1.24mm	300
1/2 " x 1 "	19	12.7mm x 25.4mm	1.06mm	265
1/2 " x 1/2 "	18	12.7mm x 12.7mm	1.24mm	300
1/2 " x 1/2 "	19	12.7mm x 12.7mm	1.06mm	275
1/2 " x 1/2 "	20	12.7mm x 12.7mm	0.88mm	250
1/2 " x 1/2 "	21	12.7mm x 12.7mm	0.81mm	230
1/2 " x 1/2 "	22	12.7mm x 12.7mm	0.71mm	215
1/4 " x 1/4 "	23	6.35mm x 6.35mm	0.63mm	215
3/8 " x 3/8 "	21	9.35mm x 9.35mm	0.81mm	250

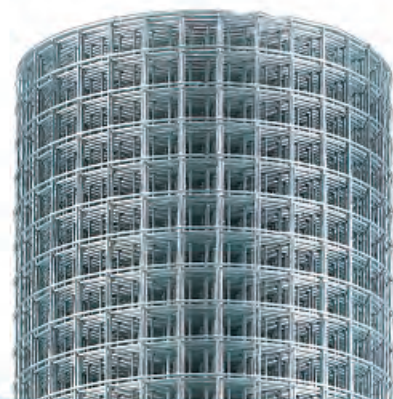

Through high-precision processing, the end product is level and flat, sturdy structure, and even strength throughout, which is widely used in industry, farming construction, transportation and mining for protection of structure, safety segregation, keeping of poultry and livestock, and decoration.




Varieties available: Galvanized (hot-dipped&electro) and PVC coated. Width: 3', 4', 5', 6', 7'

Packing, other width, length specification are at buyer' s option. Hot-dipped welded wire mesh is galvanised by hot-dipping after welding, having good corrosive resistance and qualities which are not usually found in average wire mesh.

Electro welded wire mesh is characterized by its fine qualities, sturdiness and durable, economy as well as attractiveness.

- Electro welded wire mesh, plastic coated on galvanized core
- Green ral6005 powder coating
- Tensile strength: line wires: 450-550nwt/mm2
Cross wires: 600-700nwt/mm2
- Mesh: 100x50mm, 100x75mm, 50x60mm, 100x100mm
- Wire: 2.2/1.7mm, 2.5/2.0mm
- Other customer requirement is available

Height	Length
60cm	10m/25m
80cm	10m/25m
100cm	10m/25m
120cm	10m/25m
150cm	10m/25m
180cm	10m/25m
200cm	10m/25m

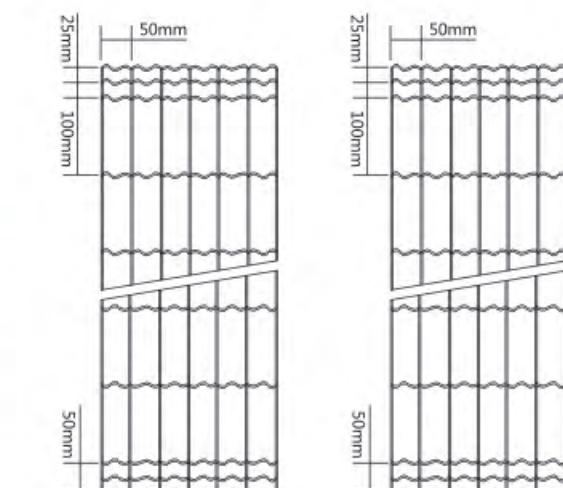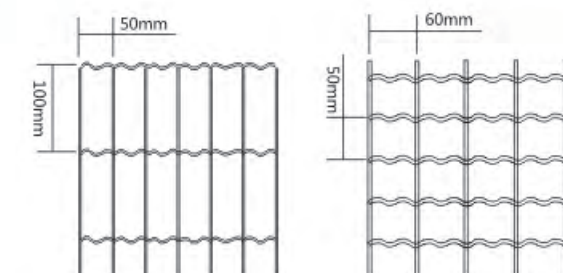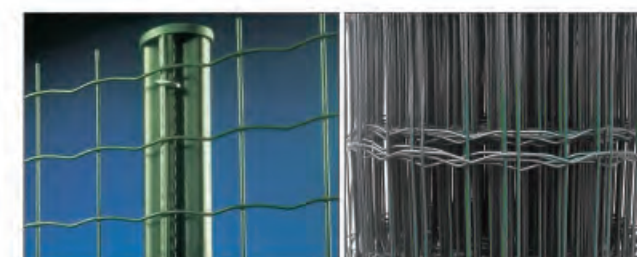

HEXAGONAL WIRE NETTING

六角网 >>>>

Hexagonal wire netting is also known by the name of chicken mesh at everyday life. Hex.wire netting is made of galvanised iron(GI) and galvanized iron drawn(GID) wire in width of 0.6-2m. Hexagonal wire netting is mostly used in light fencing for poultry farms, birds cages, tennis courts, light reinforcement in splinter proof glass, cement concrete, plastering and laying of roads. It can also used for insulation in cold storage and AC plans.



Electronic Galvanized Hex.Wire Netting			
Wire Gauge	Mesh (inch)	Wire Gauge	Mesh (inch)
19#	1 "	22#	1/2 "
20#	1 "	23#	1/2 "
21#	1 "	24#	1/2 "
19#	1 1/4 "	25#	1/2 "
20#	1 1/4 "	26#	1/2 "
21#	1 1/4 "	21#	5/8 "
22#	1 1/4 "	22#	5/8 "
18#	1 1/2 "	23#	5/8 "
19#	1 1/2 "	24#	5/8 "
20#	1 1/2 "	25#	5/8 "
21#	1 1/2 "	20#	3/4 "
18#	2 "	21#	3/4 "
19#	2 "	22#	3/4 "
20#	2 "	23#	3/4 "
21#	2 "	24#	3/4 "
22#	2 "	25#	3/4 "

Varieties


- Galvanized hexagonal iron wire netting
- Galvanized hexagonal wire netting, reverse twisted
- Galvanized hexagonal wire netting with reinforcement, reverse twisted.
- Plastic-coated hexagonal wire netting
- Width: size 3 'x100 ' , 4 'x100 ' , 1mx25m and other width according to customers ' requirement.

P.V.C Coated Hex. Wire Mesh			
Wire Gauge	Mesh / inch	Wire Gauge	Mesh / inch
19#	1"	22#	1/2"
20#	1"	23#	1/2"
21#	1"	24#	1/2"
19#	1 1/4"	25#	1/2"
20#	1 1/4"	26#	1/2"
21#	1 1/4"	21#	5/8"
22#	1 1/4"	22#	5/8"
18#	1 1/2"	23#	5/8"
19#	1 1/2"	24#	5/8"
20#	1 1/2"	25#	5/8"
21#	1 1/2"	20#	3/4"
18#	2"	21#	3/4"
19#	2"	22#	3/4"
20#	2"	23#	3/4"
21#	2"	24#	3/4"
22#	2"	25#	3/4"

GALVANIZED SQUARE WIRE MESH

<<<< 镀锌方眼网

Galvanized square wire mesh is made of in galvanized iron wire. Square wire mesh is commonly used at mosquito net and in sieves, sugar, chemical, stone crusher.

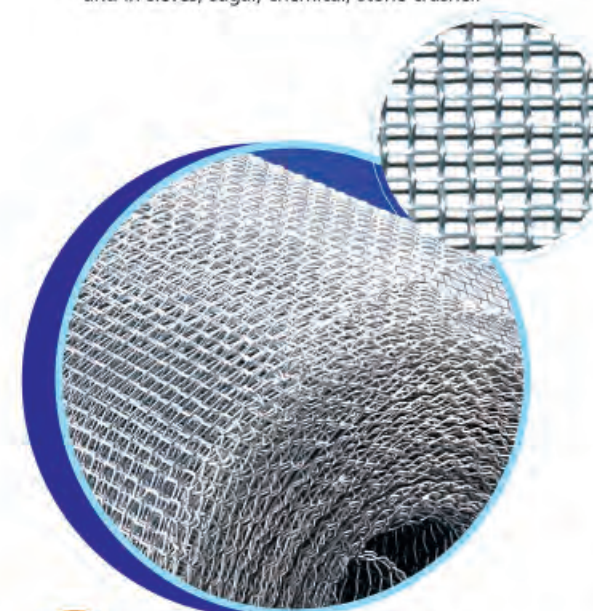

Specification available:

- Gauge: BWG 15 To BWG 30
- Mesh: 2 to 14
- Width: 2' to 7'
- Length: 10' to 300'
- Workmanship: hot-dipped gal. Before or after weaving; Elec.Gal. Before or after weaving.

Gauge	Mesh	WxL	G.W./Roll
BWG15	2	3'X100'	50
BWG16	2	3'X100'	40
BWG19	3	3'X100'	43
BWG20	3	3'X100'	34
BWG20	4	3'X100'	45
BWG21	4	3'X100'	35.6
BWG22	4	3'X100'	27
BWG23	4	3'X100'	22
BWG22	5	3'X100'	34
BWG23	5	3'X100'	27.6
BWG24	5	3'X100'	21.8
BWG25	5	3'X100'	17.4
BWG22	6	3'X100'	41
BWG23	6	3'X100'	33
BWG24	6	3'X100'	25.2
BWG25	6	3'X100'	21
BWG26	6	3'X100'	17
BWG24	8	3'X100'	34
BWG25	8	3'X100'	27.8
BWG26	8	3'X100'	22.5
BWG27	8	3'X100'	18
BWG26	10	3'X100'	28
BWG27	10	3'X100'	2.5
BWG28	10	3'X100'	17.5
BWG29	10	3'X100'	15
BWG30	10	3'X100'	13

Mesh Diameter (mm)	Tolerance (mm)	Max.Deviation Tolerance (mm)
12	0.50	1.61
14	0.45	1.36
16	0.40	1.19
18	0.35	1.06
20	0.30	0.97
30	0.25	0.59
40	0.20	0.44
50	0.16	0.35
60	0.15	0.27

BLACK IRON WOVEN CLOTH

<<<< 黑丝布



Black iron woven cloth is made of quality galvanized iron wires. The weaving is refined and neat, the structure is strong and durable, which are used in mainly industries. fish breeding, transportation, petrochemical and household apparatus.

Mesh/inch	Wire Dia.mm	Aperture(mm)
10meshx10mesh	wire dia.0.60mm	1.94mm
16meshx16mesh	wire dia.0.45mm	1.138mm
20meshx20mesh	wire dia.0.40mm	0.87mm
30meshx30mesh	wire dia.0.25mm	0.59mm
40meshx40mesh	wire dia.0.21mm	0.43mm
50meshx50mesh	wire dia.0.17mm	0.338mm
60meshx60mesh	wire dia.0.15mm	0.273mm
70meshx70mesh	wire dia.0.14mm	0.223mm
80meshx80mesh	wire dia.0.14mm	0.178mm
Width:(0.6~1.2m)		




STAINLESS STEEL WIRE MESH

不锈钢丝编织网



Specification:

Mesh/inch	Wire Diameter		Aperture		Open Area	Weight(LB) /100 Square Foot
	Inch	MM	Inch	MM		
1x1	0.080	2.03	0.920	23.37	84.6	41.1
2x2	0.063	1.60	0.437	11.10	76.4	51.2
3x3	0.054	1.37	0.279	7.09	70.1	56.7
4x4	0.063	1.60	0.187	4.75	56.0	104.8
4x4	0.047	1.19	0.203	5.16	65.9	57.6
5x5	0.041	1.04	0.159	4.04	63.2	54.9
6x6	0.035	0.89	0.132	3.35	62.7	48.1
8x8	0.028	0.71	0.097	2.46	60.2	41.1
10x10	0.025	0.64	0.075	1.91	56.3	41.2
10x10	0.020	0.51	0.080	2.03	64.0	26.1
12x12	0.023	0.584	0.060	1.52	51.8	42.2
12x12	0.020	0.508	0.063	1.60	57.2	31.6
14x14	0.023	0.584	0.048	1.22	45.2	49.8
14x14	0.020	0.508	0.051	1.30	51.0	37.2
16x16	0.018	0.457	0.0445	1.13	50.7	34.5
18x18	0.017	0.432	0.0386	0.98	48.3	34.8
20x20	0.020	0.508	0.3000	0.76	36.0	55.2
20x20	0.016	0.406	0.340	0.86	46.2	34.4
24x24	0.014	0.356	0.0277	0.70	44.2	31.8
30x30	0.013	0.330	0.0203	0.52	37.1	34.8
30x30	0.012	0.305	0.0213	0.54	40.8	29.4
30x30	0.009	0.229	0.0243	0.62	53.1	16.1
35x35	0.011	0.279	0.0176	0.45	37.9	29.0
40x40	0.010	0.254	0.0150	0.38	36.0	27.6
50x50	0.009	0.229	0.0110	0.28	30.3	28.4
50x50	0.008	0.203	0.0120	0.31	36.0	22.1
60x60	0.0075	0.191	0.0092	0.23	30.5	23.7
60x60	0.007	0.178	0.0097	0.25	33.9	20.4
70x70	0.0065	0.165	0.0078	0.20	29.8	20.8
80x80	0.0065	0.165	0.0060	0.15	23.0	23.2
80x80	0.0055	0.140	0.0070	0.18	31.4	16.9
90x90	0.005	0.127	0.0061	0.16	30.1	15.8
100x100	0.0045	0.114	0.0055	0.14	30.3	14.2
100x100	0.004	0.102	0.0060	0.15	36.0	11.0
100x100	0.0035	0.089	0.0065	0.17	42.3	8.3
110x110	0.004	0.1016	0.0051	0.1295	30.7	12.4
120x120	0.0037	0.0940	0.0064	0.1168	30.7	11.6
150x150	0.0026	0.0660	0.0041	0.1041	37.4	7.1
160x160	0.0025	0.0635	0.0038	0.0965	36.4	5.94
180x180	0.0023	0.0584	0.0033	0.0838	34.7	6.7
200x200	0.0021	0.0533	0.0029	0.0737	33.6	6.2
250x250	0.0016	0.0406	0.0024	0.0610	36.0	4.4
270x270	0.0016	0.0406	0.0021	0.533	32.2	4.7
300x300	0.0051	0.0381	0.0018	0.0457	29.7	3.04
325x325	0.0014	0.0356	0.0017	0.0432	30.0	4.40
400x400	0.0010	0.0254	0.0015	0.370	36.0	3.3
500x500	0.0010	0.0254	0.0010	0.0254	25.0	3.8
635x635	0.0008	0.0203	0.0008	0.0203	25.0	2.63

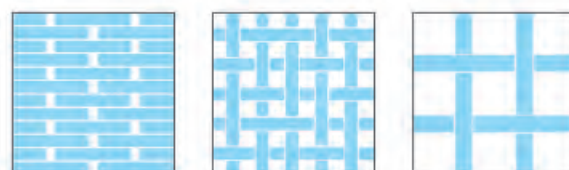


Stainless steel wire mesh and stainless steel wire cloth products are widely used in petroleum, chemical industry, environment protection, mine, airspace, paper-making, electronic, metallurgy etc.

Material Type: Type304, Type 304L, Type 316 and Type 316L.

Mesh Diameter:

Mesh Diameter (mm)	Tolerance (mm)	Max.Deviation Tolerance (mm)
0.020-0.049	+0.002 -0.001	0.001
0.050-0.074	0.002	0.002
0.075-0.089	0.002	0.002
0.090-0.109	+0.003 -0.002	0.002
0.110-0.169	0.003	0.003
0.170-0.184	0.004	0.004
0.185-0.199	0.004	0.004
0.200-0.299	0.005	0.005
0.300-0.310	0.006	0.006
0.320-0.499	0.006	0.006

Special size and specification are available according to customer's requirement.



STRONG STAINLESS STEEL SECURITY SCREEN



金刚网

Strong Stainless Steel Security Screen may look like an ordinary steel fly screen, and although it does this job extremely well by allowing 70-80% of the breeze to flow through your home, whilst keeping bugs and intruders out, the real advantage of this product lies in its ability to withstand incredible force.



BRASS WIRE MESH

黄铜网

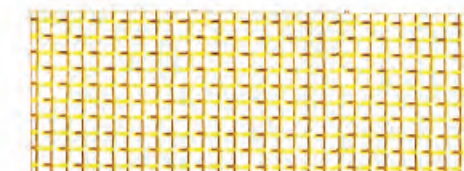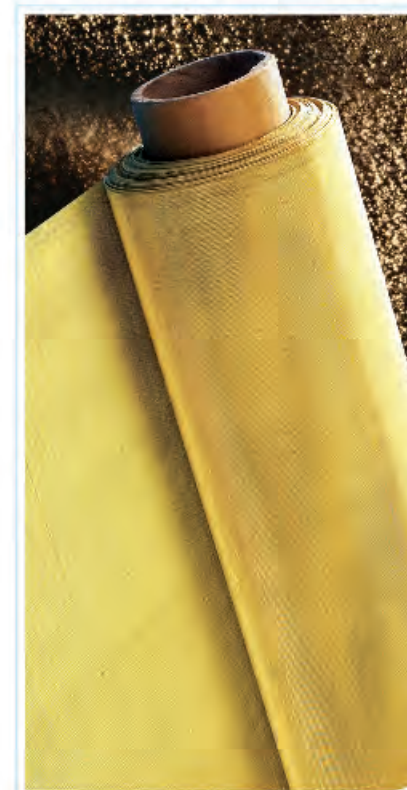

Brass wire mesh

Brass is an alloy of copper and zinc, it has much better abrasive resistance, better corrosion resistance and lower electrical conductivity, comparing with copper. Phosphor bronze is an alloy of tin, phosphorous and copper; it is corrosion, water and tear resistant, but is not suitable for exposure to hydrochloric acid or strong oxidizing agents.

Brass and phosphor bronze are frequently used in sieving diversified pellets, powders, porcelain clays and glasses, chinaware printing, filtering liquid and gas. We are capable of supplying brass wire mesh from 1-200 mesh, and phosphor bronze wire mesh from 1-500 mesh. 3'x100' and 1mx25m are all available.

WINDOW SCREEN SERIES 窗纱 >>>>

Electro Galvanized Wire Window Screen (镀锌窗纱)

Mesh	Gauge(mm)	Size
12x12	0.23, 0.25	W: 2' to 6' L: 50' to 300'
14x14	0.21, 0.23, 0.25	
16x16	0.21, 0.23, 0.25	
18x18	0.19, 0.21, 0.23, 0.25	
22x22	0.17, 0.19, 0.21, 0.23	
24x24	0.17, 0.19, 0.21	

Plastic Window Screen (塑料窗纱)

Mesh	Gauge(mm)	Size	Colour
12x12	0.23, 0.25	W: 2' to 6' L: 50' to 300'	GREEN (DARK, LIGHT)
14x14	0.21, 0.23, 0.25		GRAY (DARK, LIGHT)
16x16	0.21, 0.23, 0.25		BLUE (DARK, LIGHT)
18x18	0.19, 0.21, 0.23, 0.25		PURE WHITE
22x22	0.17, 0.19, 0.21, 0.23		BLACK
24x24	0.17, 0.19, 0.21, 0.23		BROWN

Fiberglass Window Screen (玻璃纤维窗纱)

Mesh	Gauge(mm)	Colour
14x14	W: 2' to 6' L: 50' to 300'	GREEN (DARK, LIGHT)
14x16		GRAY (DARK, LIGHT)
14x18		BLUE (DARK, LIGHT)
16x16		PURE WHITE
16x18		BLACK

Stainless Steel Wire Window Screen (不锈钢窗纱)

Mesh	Gauge(mm)	Size(mm)
14x12	0.25, 0.30	W: 2' to 6' L: 50' to 300'
14x14	0.21, 0.23, 0.25	
16x16	0.21, 0.23, 0.25	
18x18	0.19, 0.21, 0.23, 0.25	
20x20	0.17, 0.19, 0.21, 0.23	

Enamelled Iron Wire Window Screen (烤漆窗纱)


Mesh	Gauge(mm)	Colour	Size
10x10	0.23, 0.25	BLUE GREEN DARK GREEN	W: 2' to 6' L: 50' to 300'
12x12	0.23, 0.25		
14x14	0.21, 0.23, 0.25		
16x16	0.21, 0.23, 0.25		
18x18	0.19, 0.21, 0.23, 0.25		
22x22	0.17, 0.19, 0.21, 0.23		
24x24	0.17, 0.19, 0.21		

Al-MA Alloy Wire Window Screen (铝合金窗纱)

Mesh	Gauge(mm)	Size	Colour
14x14	0.21, 0.23, 0.25	W: 2' to 6' L: 50' to 300'	WHITE LIGHT- BLUE
16x16	0.21, 0.23, 0.25		
18x18	0.19, 0.21, 0.23, 0.25		
20x20	0.19, 0.21		

Window screen series are used for industrial purposes doors and porches guards, Sieves, filters and numberless purposes. Varieties available: Electro galvanized wire, AL-MA alloy, stainless steel, fiberglass, plastic, enamelled iron etc.

Packing: Each coil moistureproof paper inside, polythene film outside; then 2 to 10 rolls in one carton.

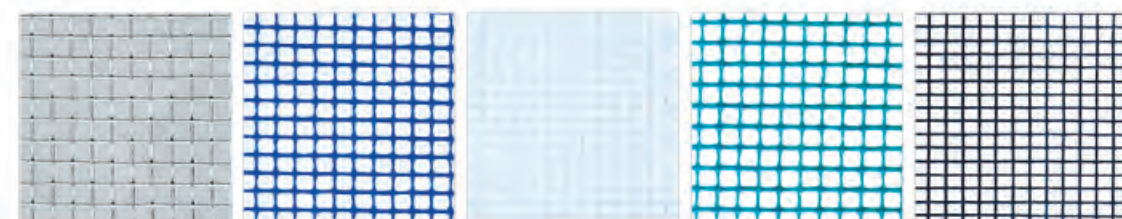


ANJIA

WIRE MESH

安加丝网

KNOTTED WIRE MESH FENCES

牛栏网

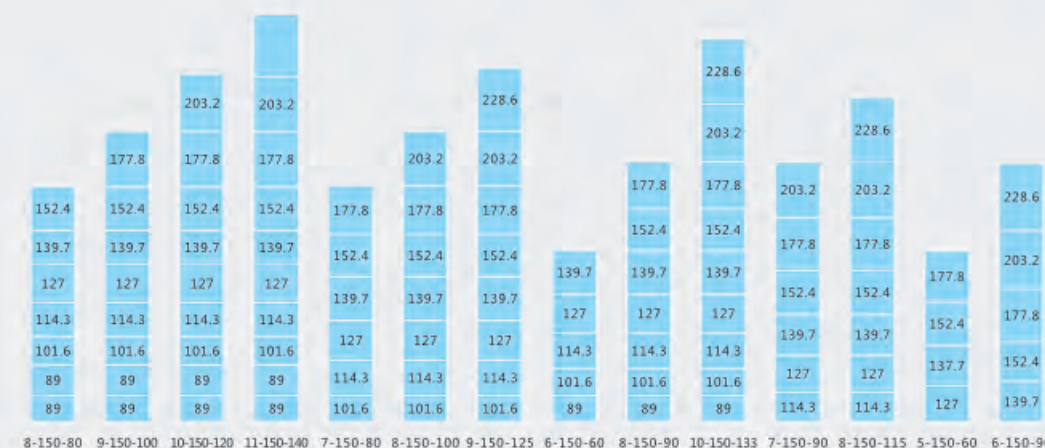

For other customer requirement is available.



Knotted Wire Mesh fences, also named Field Wire Mesh, are made of hot-dipped zinc coated steel wire, offer high strength and tensile strength, provide safety fencing against fierce striking of cattle, horse or goats. Knotted wire mesh fences make an ideal fencing material for grasslands husbandry. Customer requirement is available.




They are mainly applied to platforms and stairs at buildings,vessels,bridges,and expanded steel sheet and expand aluminium boliers.They are also used at reinforcement for light construction materials and concrete pouring,radiator grills on all types of vehicles and air compressors,safety guards for gear-drive equipment on various kinds of machines.

EXPANDED ALUMINIUM SHEET

铝板网

EXPANDED STEEL SHEET


钢板网 >>>>

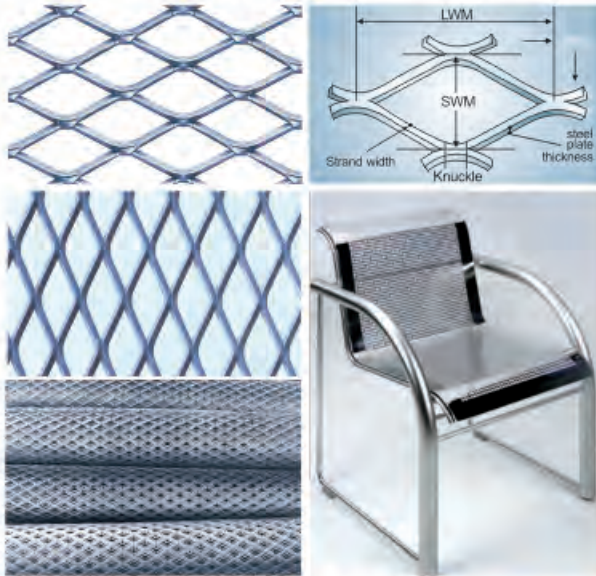

Type	Thickness d	Grid Size		Mesh Size	
		TL	TB	L (Adjust able)	B
Small Mesh (b≤2.5)	≤1.5	12	25		≤1000
		14	25		≤1000
		12.5	26		≤1000
		13	26		≤500
		13	27		≤1000
Middle-size Mesh (b≤7)	≤2	15	30		≤1000
		14	25	≤22000	≤1000
		15	30	≤22000	≤2000
	≤3	18	30	≤22000	≤22000
		12	32	≤22000	≤22000
		23	40	≤22000	≤530
		23	50	≤22000	≤2000
		28	50	≤22000	≤2000
	≤4	30	60	≤22000	≤2000
		40	80	≤22000	≤2000
		45	80	≤22000	≤2000
		44	100	≤22000	≤2000
		50	100		≤2000
		56	100		≤2000
		52	120		≤2000
	≤8	28	50	≤6000	≤2500
		30	60		≤2500
		34	80		≤2500
		40	80		≤2500
		45	80		≤2500
		44	100		≤2500
		50	100		≤2500
		52	120		≤2500
Heavy Mesh (b≤8)	≤8	43	135		≤1000
		64	150		≤2500
		100	200		≤2500

PERFORATED METAL SHEET

冲孔网 >>>>

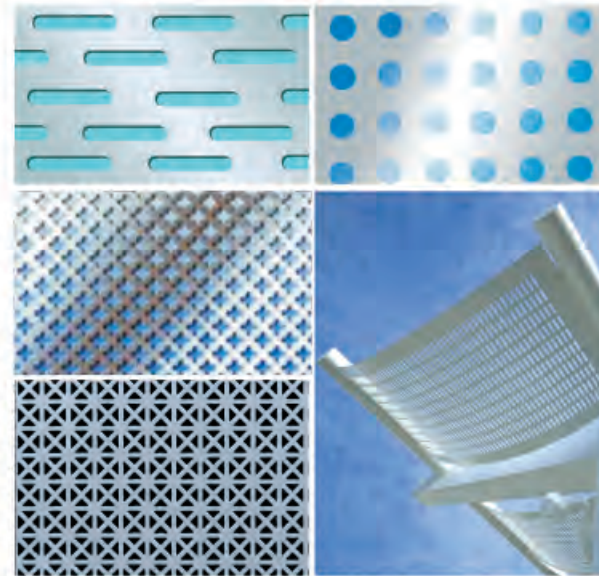

specifications			
mesh thickness (mm)	distance short(mm)	distance long(mm)	strip(mm)
0.5	2.5	4.5	0.5
0.5	10	25	0.5
0.6	10	25	1
0.8	10	25	1
1	10	25	1.1
1	15	40	1.5
1.2	10	25	1.1
1.2	15	40	1.5
1.5	15	40	1.5
1.5	23	60	2.6
2	18	50	2.1
2	22	60	2.6
3	40	80	3.8
4	50	100	4
4.5	50	100	5
5	50	100	5
6	50	100	6
8	50	100	8

Other specifications and size can be produced as buyers' requirements.

BRICKNET / CORNER BEADS

墙角网 >>>>



EXPANDED BRICK MESH

Used prlmarily as anti+cracking reinfor cement in the construction of brick and block masonry.

Width	Length	Thickness
64mm	20m	0.45mm
144mm	20m	0.45mm
178mm	20m	0.45mm
229mm	20m	0.45mm
305mm	20m	0.45mm

BRICKNET

It is another special galvanized type of netting That is used as reinforcement In brick laying. Hot dipped galvanized after weavng 70mm width wlth 45.7 meters roll.



WELDED BRICK MESH

It is a special galvanized type of welded mesh Used as reinforcement in bricking laying.

Mesh	Width	Length
23x45mm	70mm	46m
23x45mm	90mm	46m
23x45mm	160mm	46m



Corner Bead creates a rust proof, dent resistant finished corner. Available in multiple lengths to help reduce waste and minimize splicing. The intricate pattern of holes allows mud to penetrate through the bead to the drywall. The bead becomes part of the wall. Easy to use. Simply fasten to the drywall and you're ready to mud.



Flange size	Thickness	Length
32mm	0.50mm	3m

Flange size	Thickness	Length
60mm	0.45mm	3m
60mm	0.45mm	3m
60mm	0.45mm	3m
30mm	0.45mm	3m

Flange size	Thickness	Length
45mm	0.45mm	3m

Corner bead is available in stainless steel, powder coated galvanized steel or aluminum. We can offer series expanded metal fabricated products ts including rib lath and corner beads for construction.

Corner beads can be supplied in expanded metal or perf orated metal, mainly used for plastering of walls. Finishes can be hot dipped zinc coating or electro galvanizing.


We are also able to produce other size according to customers'request.

BARBED WIRE 刺绳 >>>>




Gauge	Barbs Spacing 3"	Barbs Spacing 4"	Barbs Spacing 5"	Barbs Spacing 6"
12x12	6.0617	6.7590	7.2700	7.6376
14x14	7.3335	7.9051	8.3015	8.5741
12-1/2x12-1/2	6.9223	7.7190	8.3022	8.7221
12-1/2x14	8.1096	8.814	9.2242	9.5620
13x13	7.9808	8.899	9.5721	10.0553
13x14	8.8448	9.6899	10.2923	10.7146
13-1/2x14	9.6079	10.6134	11.4705	11.8553
14x14	10.4569	11.6590	12.5423	13.1752
14-1/2x14-1/2	11.9875	13.3671	14.3781	15.1034
15x15	13.8927	15.4942	16.6666	17.5070
15-1/2x15-1/2	15.3491	17.1144	18.4060	19.3386

Galvanized barbed iron wire is used in industry, agriculture, animal husbandry, dwelling house, plantation or fencing

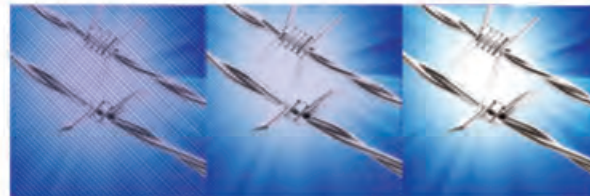

RAZOR WIRE 刀片刺绳 >>>>

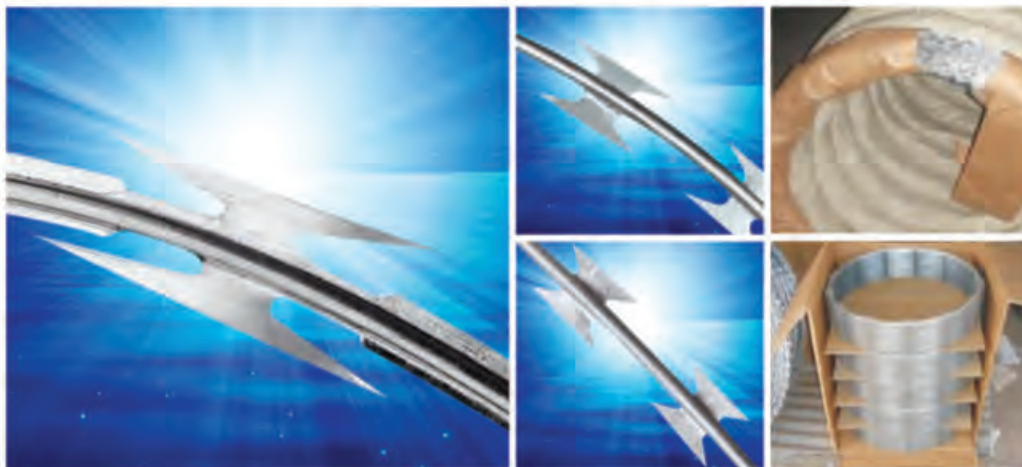

Razor Blade Specification(规格尺寸)

Reference Number	Blade Style	Thickness	Wire Dia	Barb Length	Barb Width	Barb Spacing
BTO-12		0.5±0.05	2.5±0.1	12±1	13±1	26±1
BTO-18		0.5±0.05	2.5±0.1	18±1	15±1	33±1
BTO-22		0.5±0.05	2.5±0.1	22±1	15±1	34±1
BTO-65		0.6±0.05	2.5±0.1	65±2	21±1	100±2



The Length and diameter of the coil can be designed according to the customers' needs. Material available: galvanized steel sheet and wire, or stainless steel sheet and wire.

Razor Wire Specification (刀片规格形式)

Outside Diameter	NO. of Loops	Standard Length Per Coil	Type	Notes
450mm	33	8m	CBT-65	Single coil
500mm	41	10m	CBT-65	Single coil
700mm	41	10m	CBT-65	Single coil
960mm	53	13m	CBT-65	Single coil
500mm	102	16m	BTO-12.18.22	Cross type
600mm	86	14m	BTO-12.18.22	Cross type
700mm	72	12m	BTO-12.18.22	Cross type
800mm	64	10m	BTO-12.18.22	Cross type
960mm	52	9m	BTO-12.18.22	Cross type



CHAIN LINK FENCE <<<< 斜方网

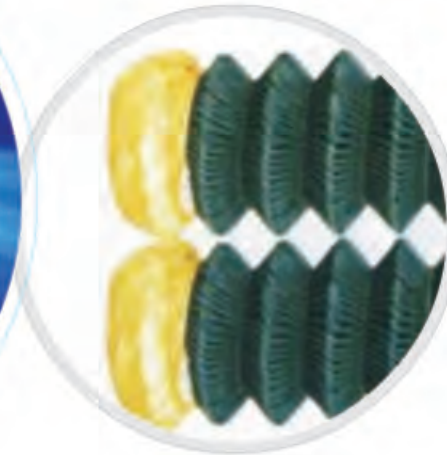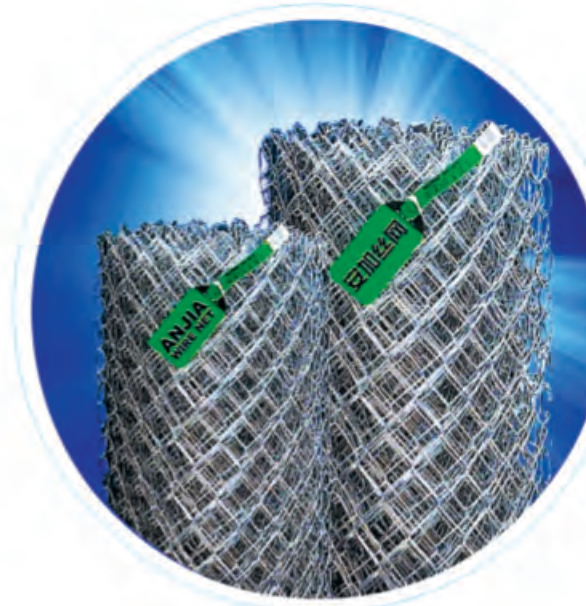

Chain Link Fence is widely used in such as doors, windows, fences and rails, Assortment Galvanized and plastic-coated.
Width: 3', 4', 5', 6'
Specification: 1", 2", 3", 4"
Length: 10m - 25m

Opening	1"	1.5"	2"	2.25"	2.4"	2.5"	3"	4"
	25mm	40mm	50mm	55mm	60mm	65mm	76mm	100mm
Wire diameter	18#-7#							
Length of the roll	1.20mm - 5.00mm							
Width of the roll	10m - 25m							
	0.5m - 5.0							

Materials and specifications can be made according to customers' specific

Galvanized barbed iron wire is used in industry, agriculture, animal husbandry, dwelling house, plantation or fencing



GALVANIZED WIRE

镀锌铁丝


Hot dipped galvanized wire and Electro galvanized wire	
Metric system	British System
4.0mm-0.30mm	BWG8-BWG30
Tensile strength: 30-55kg/mm ²	
Zinc coating: 20-32g/m ² 6-15g/m ²	
Packing: inside polyethylene film, outside PVC or hessian cloth	



NAILS

钉子

>>> common nails
>>> Roofing nails
>>> Concrete nails, etc
Material: Iron, steel, carbon steel, stainless steel
Length: From 1/2" to 6"
Shank diameter: 3BWG-20BWG
Surface: Galvanized/ hot galvanized/ polished
Package: 1kg/2kg/2.5kg/5kg/20kg/25kg per carton with water-proof plastic bag inside. Your request can be acceptable.

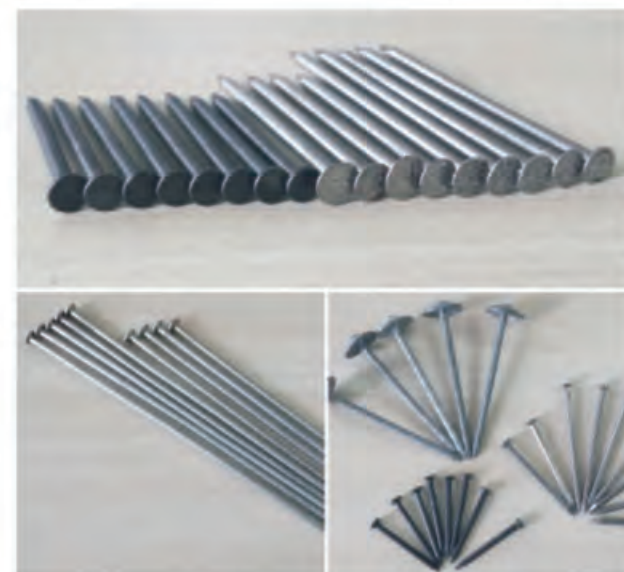

ANJIA WIRE MESH

Galvanized barbed iron wire is used in



PVC COATED IRON WIRE

涂塑铁丝


Core Diameter	Outside Diameter
1.0mm-3.5mm	1.4mm-4.0mm
BWG.11-20	BWG.8-17
SWG.11-20	SWG.8-17
Tensile strength: 30-55kg/mm ²	
Color: Green, blue, yellow, orange, gray and so on	
Packing: lined with P.V.C. Strips and wrapped with PVC or hessian cloth	

Straight cut wire is a kind of tie wire made with iron wire cutting to certain sizes after being straightened

Materials can be iron wire, black annealed wire or pvc coated wire.

Standard wire diameter of cut wire: 0.6mm, 0.7mm, 0.8mm, 0.9mm, 1.0mm, 1.2mm, 1.45mm, 1.5mm, 2mm, 2.2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm

Application: Straight cut wire used in binding up construction materials or other items. Straight cut wire is made of galvanized iron wire straightened then cut into pieces of various lengths according to your requirement.

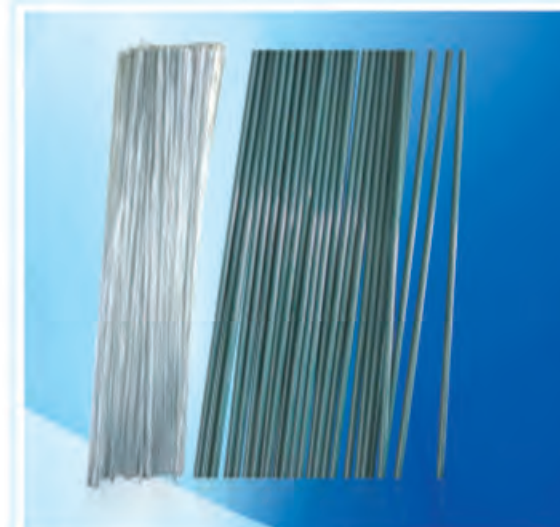

BLACK WIRE

黑铁丝

The varieties of products: black annealed iron wire, soft light annealed iron wire.
The standard size: BWG5-BWG24
T/S(kg/mm): 30-55
Package: One coil weighted 0.5-800kg is packed in the wax paper or PVC bags then gunny cloth.



STAINLESS STEEL WIRE

不锈钢丝

Deviation(mm)	Standard	
	Tolerance(mm)	Max.Deviation(mm)
0.32-0.45	±0.006	±0.006
0.50-0.75	±0.006	±0.006
0.80-0.95	±0.008	±0.008
1.00-1.25	±0.010	±0.010
1.30-1.50	±0.010	±0.010
1.60-1.80	±0.015	±0.015
2.0-2.5	±0.015	±0.015
3.0-4.0	±0.015	±0.015



CUT WIRE

切断丝

Hebei ANJIA

Wire net Wuxing Co., Ltd



Anjia fence set

We can supply various wire mesh fence and post for worldwide customers.

The surface working usually include the Galvanized, PVC coating, and inner hot dipped or electro galvanized, outer PVC coating in order to reinforce the durable use. You can choose the colors by your requirements, like Dark green (Ral 6005), Black (Ral9005) and so on.

Usage: Protection for road, railway, airport, residence district, seaport, garden, feeding and husbandry. Our mesh fence products enjoy such properties as corrosion resistance, aging resistance, sunshine resistance and weather resistance, acid and alkali resistance, no color fading, smooth and neat surface and comfortable touch.

The special specification can be done according to the requests of the customer.



GARDEN GATE 花园门 >>>>

CIRCULAR TUBE SINGLE WING

Size	Gatepost	Frampost
800 x 1000mm	60x60x1.5mm	40x1.5mm
1000 x 1000mm	60x60x1.5mm	40x1.5mm
1250 x 1000mm	60x60x1.5mm	40x1.5mm
1500 x 1000mm	60x60x1.5mm	40x1.5mm
1750 x 1000mm	60x60x1.5mm	40x1.5mm
2000 x 1000mm	60x60x1.5mm	40x1.5mm

Our garden gate is made of circular or square galvanized tube with welded mesh inside.

The surface treatment is powder coated.


The colour can be customer's choice.

The mesh size: 50x50mm, 100mmx50mm, 200mmx50mm

The wire dia: 4mm or 5mm

Single wing and double wing are available

Other size maybe available upon request

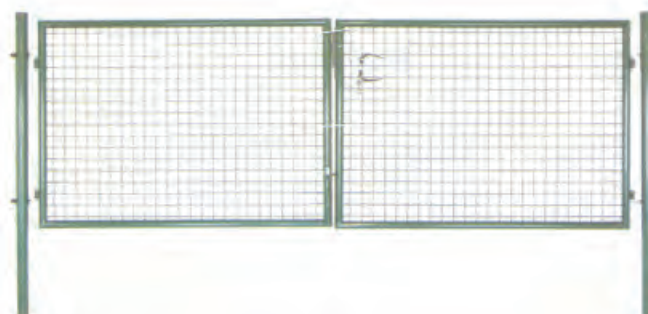

CIRCULAR TUBE SINGLE WING


Size	Gatepost	Frampost
800 x 3000mm	60x1.5mm	40x1.5mm
1000 x 3000mm	60x1.5mm	40x1.5mm
1250 x 3000mm	60x1.5mm	40x1.5mm
1500 x 3000mm	60x1.5mm	40x1.5mm
1750 x 3000mm	60x1.5mm	40x1.5mm
2000 x 3000mm	60x1.5mm	40x1.5mm

Size	Gatepost	Frampost
800 x 4000mm	75x1.5mm	40x1.5mm
1000 x 4000mm	75x1.5mm	40x1.5mm
1250 x 4000mm	75x1.5mm	40x1.5mm
1500 x 4000mm	75x1.5mm	40x1.5mm
1750 x 4000mm	75x1.5mm	40x1.5mm
2000 x 4000mm	75x1.5mm	40x1.5mm


TEMPORARY FENCE PANEL 临时护栏




Mesh size: 5.0mmx100mmx200mm
Frame size: 2.4mx1.16m
3.0mx1.16m
3.6mx1.16m
4.2mx1.16m

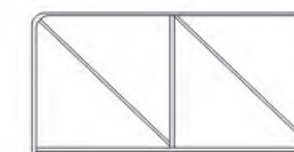

Mesh size: 5.0mmx100mmx200mm
Frame size: 2.4mx1.16m
3.0mx1.16m
3.6mx1.16m
4.2mx1.16m

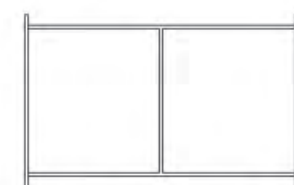

Mesh size: 3.0mmx75mmx75mm
Farm gate size: 3.3mx2.17m

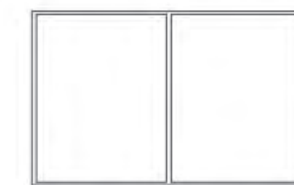


Mesh size: 3.0mmx75mmx75mm
Farm gate size: 3.3mx2.17m



- Temporary fencing systems can quickly and easily be installed, no need to disturb the surface area by digging holes or laying foundations.
 - temporary fencing to secure construction sites and Private property
 - temporary fencing of residential housing sites
 - temporary fencing and crowd control barriers for major public events, sports, concerts, festivals, gatherings etc.
 - temporary safety fencing for swimming pools
 - and many other uses
- Can supply all fittings and accessories
- temporary fence sections:
 - Wire dia: 3mm, 4mm, 5mm
 - Pipe: 32mm pipe frame or 38mm pipe frame wire welded mesh infills or galvanized chain link infills.
- Other customer requirement can be produced.



REINFORCING MESH 建筑网片

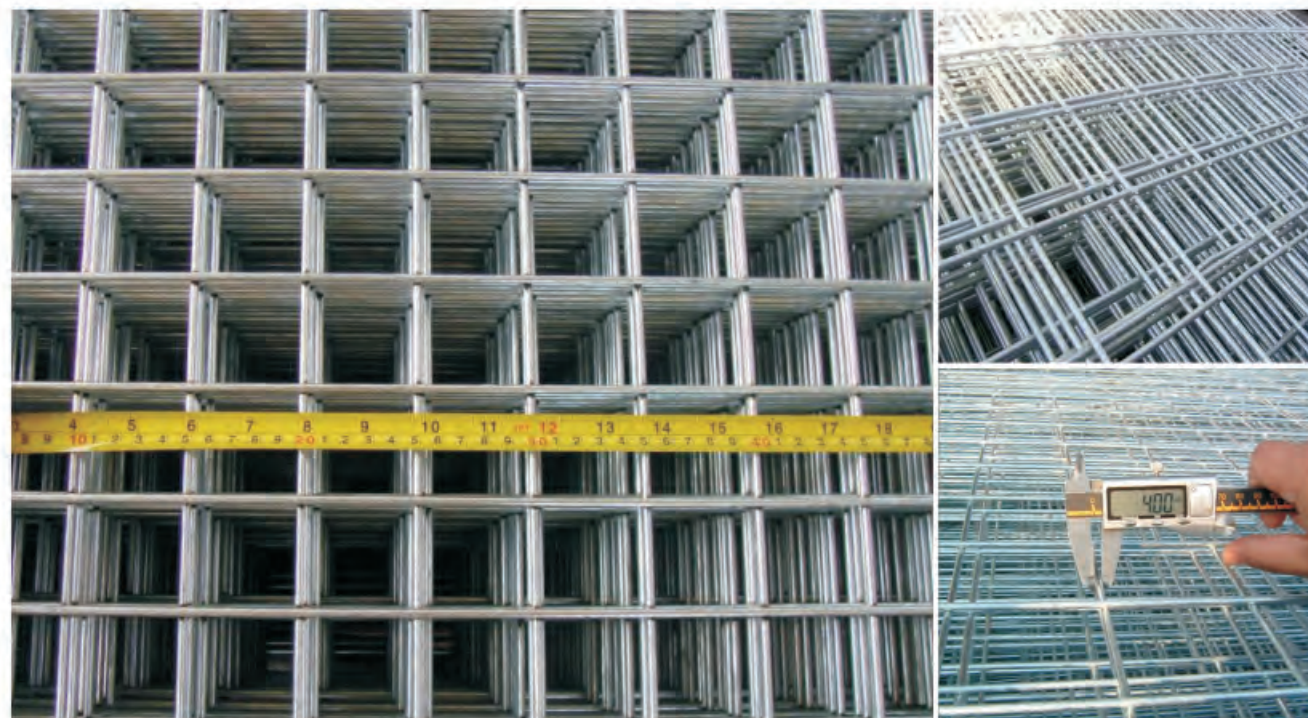

ANY
WIRE MESH


安加网

Welded mesh fabric reinforcement standard fabrics

	Mesh size nominal pitch of wire		Wire sizes		Supplied in
	Main mm	Cross mm	Main mm	Cross mm	
Square mesh fabric	200	200	10	10	Sheets only 6mx2.4m
	200	200	9	9	
	200	200	8	8	
	200	200	7.1	7.1	Sheets or rolls
	200	200	6.3	6.3	
	200	200	5.6	5.6	
Design mesh fabric	200	200	4	4	Sheets only 6mx2.4m
	100	200	12	8	
	100	200	11	8	
	100	200	10	7.1	
	100	200	9	7.1	
	100	200	8	6.3	
Longitudinal mesh fabric	100	200	7.1	6.3	Sheets only 6mx2.4m
	100	200	6.3	5.6	
	100	200	5.6	5.6	
	100	300	6.3	4	Sheets or rolls 6mx2.4m
Special mesh	100	300	5.6	4	
	100	300	4	4	
	100	300	4	4	Sheets or rolls 6mx2.4m
	100	300	3.55	3.55	

Other size can be available according to customers' request

SECURITY FENCE 安全护栏/密纹网

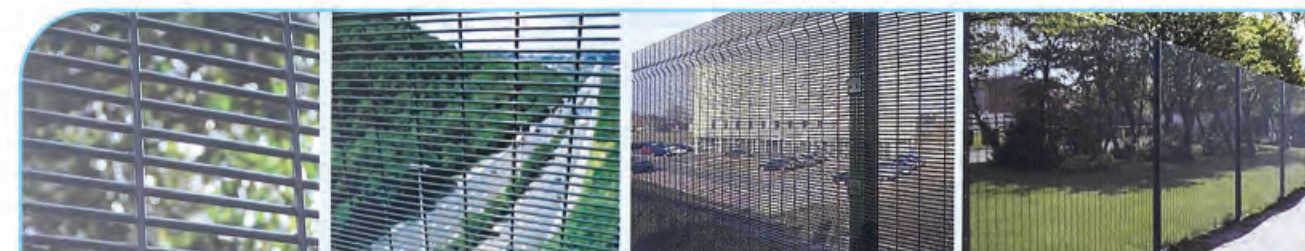

■ Panels

Manufactured from hard drawn wire and electro-resistance welded at every intersection
Mesh pattern: 76.2mm(3")x12.7mm(0.5") resistance welded at each intersection
Horizontal wires: 4mm
Vertical wire: 4mm
Height: 1270mm to 6000mm

■ Finish available

1. Colour coated in a range of 8 standard colours with a galvanise substrate.
2. Hot dipped galvanised

We also can customise sheet size and lapping requirements according to particular client need.

DOUBLE WIRE FENCE 双丝栅栏



■ Specification:

868 panels are constructed in a series of 6mm vertical wires at 50mm centres welded between two 8mm horizontal wires at 200mm centres creating a rigid structure supported on post

■ Heights available

630mm to 5.0 metre options available

■ Finishes available

1. hot dipped galvanised
2. galvanised & polyester powder coated in an extensive range of RAL colours

■ Other model and fence post solutions maybe produced by customer request

Panel construction	No.	Dimensions
Verticals	1	50mm centres
Horizontals	2	200mm centres



Gabions is a newly produced hexagonal iron wire netting with double-twist weaving and thick wire gauge. because of its strength and flexibility, this net has been often used to prevent rocks and debris from railways.

This solution can also help to establish vegetation. the gabions and mattresses made with this net are widely used such as river training, lining of steep slopes, lining of canals and dams, bridge pillars protection etc.

Unit size lengthxwidthxheight	No. of partitions
1.0m x 1.0m x 1.0m	0
1.5m x 1.0m x 0.5m	0
1.5m x 1.0m x 1.0m	0
2.0m x 0.5m x 0.5m	1
2.0m x 1.0m x 0.3m	1
2.0m x 1.0m x 0.5m	1
2.0m x 1.0m x 1.0m	1
3.0m x 1.0m x 0.5m	2
3.0m x 1.0m x 1.0m	2

- Mesh available: 100mm x 80mm, 80x60mm, 120mm x 100mm.
Wire available: heavy galvanized wire, pvc coated wire



- Wire diameter
Heavy galvanized wire: 2.2mm, 2.7mm, 3.0mm, 3.4mm, 3.9mm
Pvc coated wire: 2.0/3.0mm, 2.5/3.5mm, 3.0/4.0mm



- In 50m rolls with width up to 4m
- Wire diameter
Heavy galvanized wire: 2.2mm, 2.7mm, 3.0mm, 3.4mm, 3.9mm
Pvc coated wire: 2.0/3.0mm, 2.5/3.5mm, 3.0/4.0mm
- The other diameter and mesh size may be available by customer request




Unit size lengthxwidthxheight	No. of partitions
3.0m x 2.0m x 0.3m	2
4.0m x 2.0m x 0.3m	3
5.0m x 2.0m x 0.3m	4
6.0m x 2.0m x 0.3m	5



Gabions are stone filled wire cages, which were used in landscaping as a retaining wall to retain or protect slopes for erosion e.g. along river banks. this new gabions made of welded mesh panels are easy for assembling and is ideal used as decoration walls in the gardens. one compartment set including 6pcs mesh sheet and 12pcs spirals, additional strengthening wire hooks are included for big sizes.

Mesh sizes available: 8x10cm, 8x12cm

Length	Width	Height
30cm	30cm	30cm
60cm	30cm	30cm
45cm	45cm	45cm
60cm	45cm	45cm
60cm	60cm	60cm
90cm	60cm	60cm
50cm	50cm	50cm
100cm	50cm	50cm
150cm	50cm	50cm
200cm	50cm	50cm

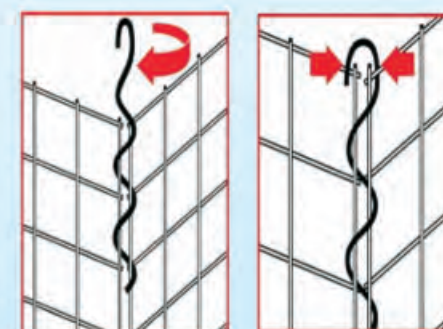

FIBERGLASS NETTING

玻纤网格布 >>>>

Recommended application: External wall thermal insulationFiberglass mesh is woven by fiberglass yarn as its basis fabric, then coated by alkaline resistant latex, It has a feature of fine alkaline-resistance, high tensile strength of warp and woof.

Advantage: Softness, and easy use for construction can help reducing consumption quantity of plaster motar.

Common specifications:

Mesh Size	Weight/sqm
4x4mm,5x5mm	45g--75g(±3g)
4x4mm,5x5mm	125g--130g(±3g)
4x4mm,5x5mm	145g(±3g)
4x4mm,5x5mm	160g(±3g)

- 1.Length/roll: 100-200m;
- 2.Width/roll: 1m--2m;
- 3.Colours : white(standard), or other colors;
- 4.Packing: each roll shrank wrapped ,then by carton



FIBERGLASS WINDOW SCREEN

玻纤窗纱 >>>>



Fiberglass window screening is weaved by adopting the technique of fiberglass single filament coating plastic plain weaving. Through thermal finalizing the design and sticking the main threads, the product has very good performance of ventilation, sunshade, which is the present substitutive product of common window screening.

The product is of high-grade and has wide application, with the characteristics of corrosion prevention, flame retardant, easy cleaning and non-deformation, and long service life. It is the best protective product of preventing insects, mosquitoes and flies for high-grade officebuilding, residence and various buildings, livestock farms, fruit gardens.


Fiberglass window screen	12x12	85g/m2	3"x100"	Available in different colors
	14x14		4"x100"	
	16x16	110g/m2	1x25M	
	16x14	120g/m2	1.2x25M	
	18x16	etc		

Packing: woven bag/carton box (as customers'request)



Name	Plastic Safety Net
Series	BR&SR
Raw Material	new HDPE with UV stabilized
Mesh size	BR Series(70x40mm,80x40mm,100x40mm,110x40mm,70x26mm,80x26mm,90x26mm,100x26mm,110x26mm) SR Series(65x36mm,70x40mm,60x40mm,50x30mm,50x50mm all available
Weight	80-400grams/sqm can be manufactured
Width	1m,1.2m,1.22m,1.5m,1.8m,
Length	20-100m is all available
Packing	usually packed in rolls in transparent plastic film inside
Feature	High strength,Ageing resistance,Anti-corrosion,Easy to install and take down, Re-usable,Flexible and lightweight
Application	Construction sites,work sites,Open excavations,sport events,Catwalks, crowd control,Snow & sand fencing,Hazardous walk areas,new building construction warning and restric

Net weight	50g/m2--300g/m2
Net width	1m,2m,4m, or by requirements.
Rolls Lengths	10m,50m,100m or by requirements.
Shade rate	30%-95%
Colours	Green,Black,Dark green,Yellow ,gray,Blur and white or by requirements.
Material	100%new material(HDPE)

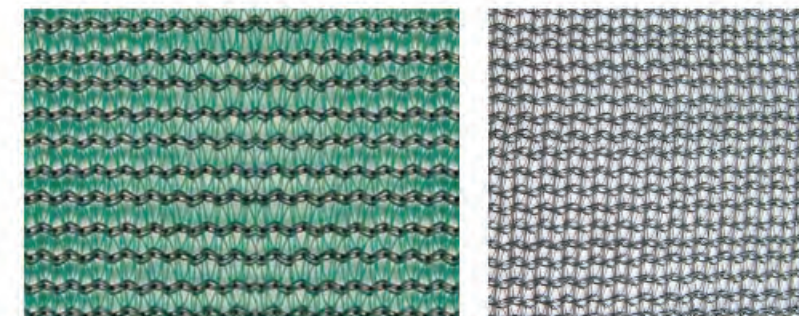

SAFETY NET

安全防护网 >>>>

SHADE NET

遮阳网 >>>>

HEAVY PLASTIC NETTING

塑料网 >>>>

HEAVY plastic mesh & netting is made of thicker thickness pvc with good shape,durable,weather-resistant,mostly used for insect screen mesh,safety netting in buildings or finshing farm.Wire diameter could be max. 1.0mm; OEM service is available

Specifications:

Wire diameter: 0.15 -1.00mm

Mesh: 6x6, 8x8, 10x10 12x12 14x14 Max. 50x50

Width: 0.5m-3.0m

Length:50' —300'

Color:Green,dark, blue,black,brown

Packing:inside plastic film outside plastic bag or according customers' requiments

